

# ProxKey® II Fob

125 kHz Proximity

Proximity Keyfob • 1346



**ACCESS** reliability.

## Application

The RF-programmable ProxKey® II proximity keyfob incorporates proximity technology into a convenient device approximately the size of an automotive key.

## Features

- ▶ Offers universal compatibility with all HID proximity readers.
- ▶ Provides an external number for easy identification and control.
- ▶ Can be placed on a key ring for convenient entry.
- ▶ Supports formats up to 85 bits, with over 137 billion codes.
- ▶ Using HID's ProxProgrammer®, card vendors can ship proximity keyfobs, custom programmed to their customers' requirements, from their own inventory. Enables smaller order quantities and overnight delivery. (Check with vendor for availability.)

- Proven, Reliable Technology** Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.
- Small and Convenient** Can be carried with keys in pocket or handbag.
- Cross-reference** A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.
- Security** Offers over 137 billion unique codes.
- Long Life** Passive, no-battery design allows for an infinite number of reads.
- Durability** Strong, flexible and resistant to cracking and breaking.
- Warranty** Lifetime warranty against defects in materials and workmanship (see complete sales policy for details).

**Typical Maximum\* Read Range**  
 ProxPoint® Plus reader-up to 1.5" (3.7 cm)  
 MiniProx™ reader-up to 2" (5 cm)  
 ThinLine® II reader-up to 2" (5 cm)  
 ProxPro® reader-up to 3" (7.5 cm)  
 ProxPro® II reader-up to 4" (10.2 cm)  
 Prox80™-up to 2" (5.1 cm)  
 MaxiProx® reader-up to 12" (28 cm)  
 \*Dependent on local installation conditions.

**Dimensions**  
 1.90" x 0.900" x 0.550"  
 (4.3 x 2.29 x 1.4 cm)

**Keyfob Construction**  
 Ultrasonically welded, ABS shell

**Operating Temperature**  
 -50° to 160° F (-45° to 70° C)


**Weight**  
 0.26 oz. (7.4 gm)

**Part Number**  
 Base Part No. I346

**Description**  
 RF-programmable, 125 kHz, charcoal gray, customer-specified ID Numbers, key ring included.

**Options**  
 • External card numbering (inkjet or laser engraving)

(Please see "How to Order Guide" for a description of the options and associated part numbers.)

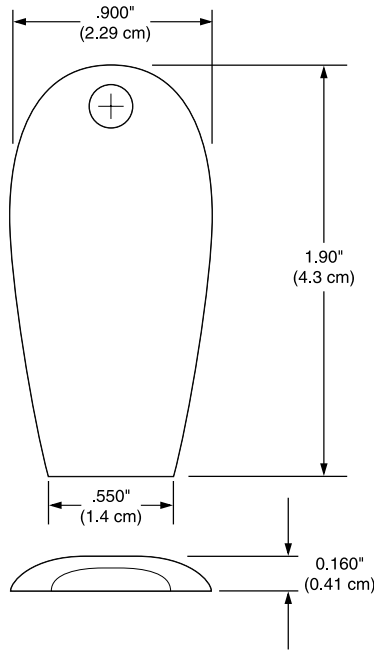

© 2007 HID Global. All rights reserved. HID, and the HID logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 4/2007

For best results, please print on recycled paper.

MKT-PROXKEYii\_DS\_EN



**ACCESS** experience.

[hidcorp.com](http://hidcorp.com)

**HID Global Offices:**

**Corporate North America**  
 9292 Jeronimo Road  
 Irvine, CA 92618-1905  
 U.S.A.  
 Phone: (800) 237-7769  
 Phone: (949) 598-1600  
 Fax: (949) 598-1690

**Asia Pacific**  
 19/F 625 King's Road  
 North Point  
 Island East  
 Hong Kong  
 Phone: +852 3160-9800  
 Fax: +852 3160-4809

**Latin America**  
 Circunvalacion Ote. #201 B  
 Despacho 2  
 Col. Jardines del Moral  
 Leon 37160, Gto.  
 Mexico  
 Phone: +52 477 779 1492  
 Fax: +52 477 779 1493

**Europe, Middle East & Africa**  
 Homefield Road  
 Haverhill, Suffolk  
 CB9 8QP  
 England  
 Phone: +44 (0) 1440 714 850  
 Fax: +44 (0) 1440 714 840